


## LED Filament G25(4W/7W/8W)

### Description:

Efficacy: 120lm/W  
 Life Time: 25,000 HR  
 RoHS  
 UL Certification

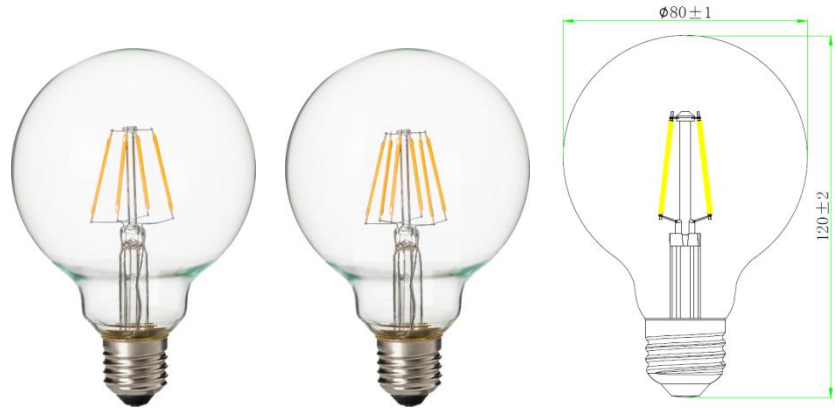

### Replacement:

40W Incandescent Bulbs  
 60W Incandescent Bulbs  
 75W Incandescent Bulbs


### Parameters:

Material: Glass  
 Input Voltage: 120/220VAC; 50/60Hz  
 CCT: 2700K/4000K/6000K  
 CRI: >80

View Angle: 360°  
 Power Supply: Non-Isolate Drive  
 Weight: 45g  
 Life: 25,000 hr

Part NO.	CCT	CRI	Lumen	Input Voltage	Wattage	PF	Base	Dim
BL.XXA04JLPA00U	2700K	80	450lm	90-135V/60Hz	4W	0.5	E26	NO
BL.XXA04JLPAD0U	2700K	80	450lm	120V/60Hz	4.5W	0.9	E26	YES
BL.XXB04JKPA000	2700K	80	450lm	176-264V/50Hz	4W	0.5	E27	NO
BL.XXB04JKPAD00	2700K	80	450lm	220-230V/50Hz	4.5W	0.7	E27	YES
BL.XXA07JLPC00U	2700K	80	800lm	90-135V/60Hz	7W	0.5	E26	NO
BL.XXA07JLPCD0U	2700K	80	800lm	120V/60Hz	7W	0.9	E26	YES
BL.XXB07JKPC000	2700K	80	800lm	176-264V/50Hz	7W	0.5	E27	NO
BL.XXB07JKPCD00	2700K	80	800lm	220-230V/50Hz	7W	0.7	E27	YES
BL.XXA08JLPC00U	2700K	80	1000lm	90-135V/60Hz	8W	0.5	E26	NO
BL.XXA08JLPCD0U	2700K	80	1000lm	120V/60Hz	8W	0.9	E26	YES
BL.XXB08JKPC000	2700K	80	1000lm	176-264V/50Hz	8W	0.5	E27	NO
BL.XXB08JKPCD00	2700K	80	1000lm	220-230V/50Hz	8W	0.7	E27	YES

## Packing information:

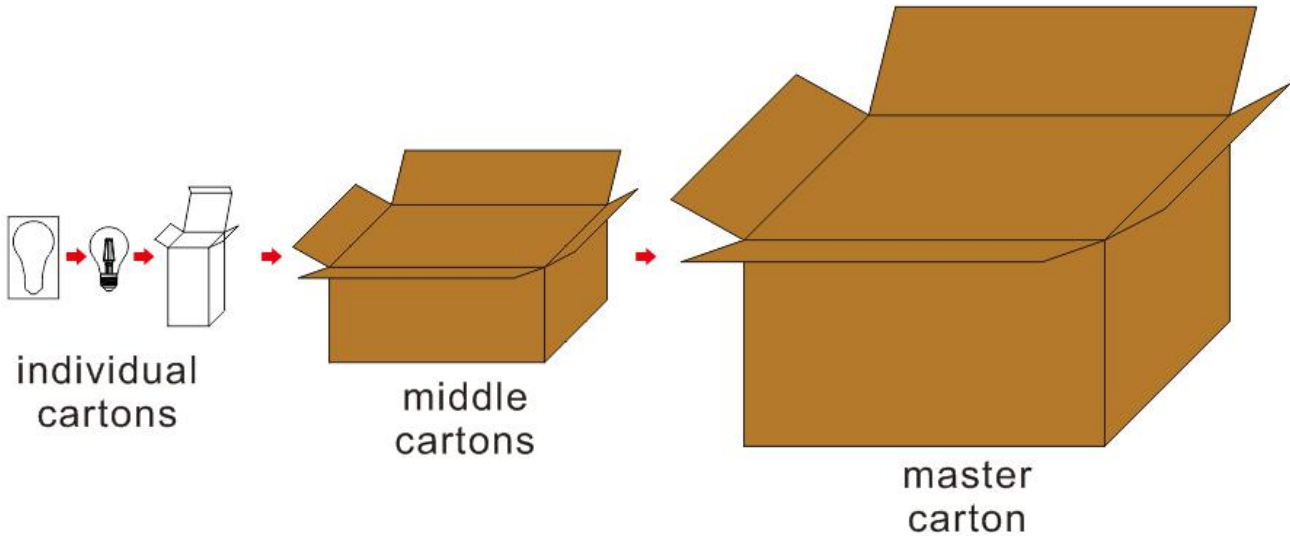

Master carton size:535\*440\*320mm  
 Net weight:2.7kg; Gross weight:8.7kg  
 15 bulbs/middle carton, 4 middle cartons/master carton

## Installation:

Connect to E26/E27 base

## Note:

1. The input voltage is 120/220VAC
2. Turn power off when install the LED filament bulbs
3. Check the bulbs and make sure it's undamaged before installation
4. LED filament bulbs are not suitable for insulated places
5. LED filament bulbs are prohibited installed outdoor place



### Description of Dimmer Matching

Our LED lights have been designed and worked with listed dimmers:

For 2W-5W

**LEVITON:**

R62-6674-P0W  
 C22-6672-1LW  
 R70-6631-1LW

**LUTRON:**

DV-600P-WH  
 MACL-153MR-WH  
 CT-600PR-WH

For >5W

**LEVITON:**

R62-6674-P0W  
 R70-6631-1LW

**LUTRON:**

DV-600P-WH  
 MACL-153MR-WH

**Remark:**

1. Mismatch dimmer may lead to poor lighting effect.
2. Dimming range:20%-80%.
3. For the items less than 3W, one dimmer has to be connected with more than 2pcs each time.