

LED Filament BR30(7W)

Description:

Efficacy: 90lm/W
 Life Time: 25,000 HR
 RoHS
 UL Certification

Replacement:

60W Incandescent Bulbs




Parameters:

Material: Glass
 Input Voltage: 120/220VAC; 50/60Hz
 CCT: 2700K/4000K/6000K
 CRI: >80

View Angle: 120°
 Power Supply: Non-Isolate Drive
 Weight: 65g
 Life: 25,000 hr

Part NO.	CCT	CRI	Lumen	Input Voltage	Wattage	PF	Base	Dim
PA.XXA07JLDC0RU	2700K	80	600lm	90-135V/60Hz	7W	0.5	E26	NO
PA.XXA07JLDCDR0	2700K	80	600lm	120V/60Hz	7W	0.9	E26	YES
PA.XXB07JKDC0R0	2700K	80	600lm	176-264V/50Hz	7W	0.5	E27	NO
PA.XXB07JKDCDR0	2700K	80	600lm	220-230V/50Hz	7W	0.7	E27	YES

Packing information:

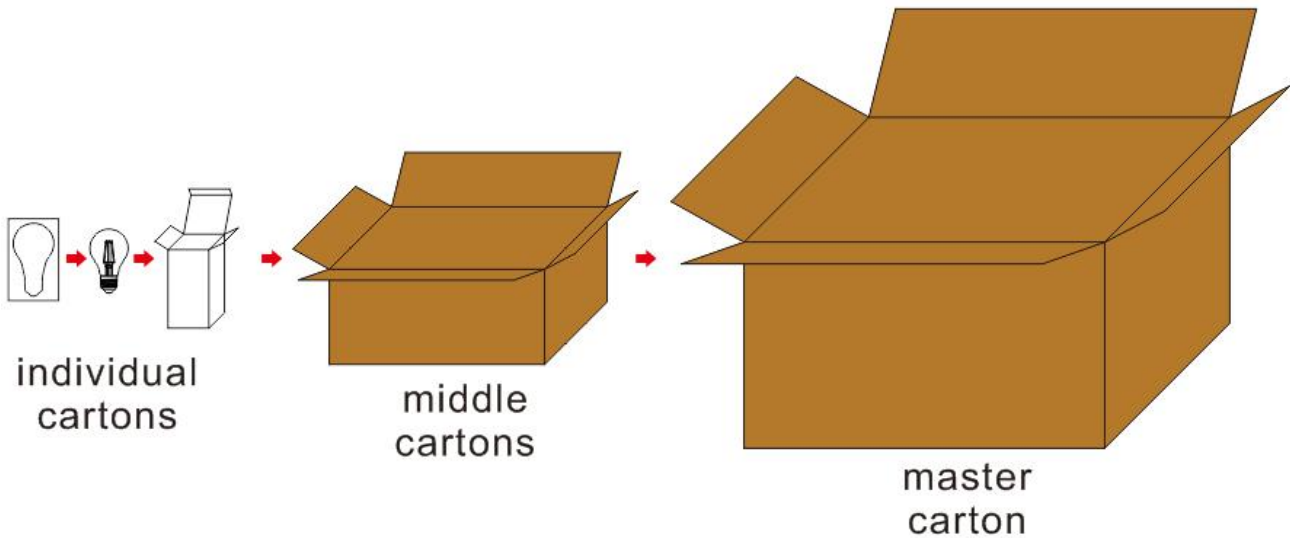

Master carton size:450*335*320mm
 Net weight:1.56kg; Gross weight:4.4kg
 6 bulbs/middle carton, 4 middle cartons/master carton

Installation:

Connect to E26/E27 base

Note:

1. The input voltage is 120/220VAC
2. Turn power off when install the LED filament bulbs
3. Check the bulbs and make sure it's undamaged before installation
4. LED filament bulbs are not suitable for insulated places
5. LED filament bulbs are prohibited installed outdoor place



Description of Dimmer Matching

Our LED lights have been designed and worked with listed dimmers:

For 2W-5W

LEVITON:

R62-6674-P0W
 C22-6672-1LW
 R70-6631-1LW

LUTRON:

DV-600P-WH
 MACL-153MR-WH
 CT-600PR-WH

For >5W

LEVITON:

R62-6674-P0W
 R70-6631-1LW

LUTRON:

DV-600P-WH
 MACL-153MR-WH

Remark:

1. Mismatch dimmer may lead to poor lighting effect.
2. Dimming range:20%-80%.
3. For the items less than 3W, one dimmer has to be connected with more than 2pcs each time.